



Westinghouse

The 2400i was the first Westinghouse inverter generator designed for the Australian market and it remains popular with a growing number of users. It is equipped with a full suite of convenient features that are all accessible from one side of the unit which is preferred in some RV applications. The 2400i is a benchmark for portable power convenience when you are enjoying the great outdoors while camping and caravanning or relying on it for mains power backup.

2400i CLASSIC Inverter Generator

2100	2400
Running Watts	Starting Watts

Features and Benefits

Powerful

2,400 Watts maximum output is the highest in its class to run more of your electrical devices.

Lightweight

At only 20 kg it can be easily carried by one person using the ergonomic non-slip handle.

Super Quiet

Low dB operating noise level that won't disturb you or your neighbours.

Long Running

Up to 14.9 hours @ 1/4 load by its fuel-efficient engine and biggest-in-class 5 L fuel tank.

Easy To Use

Yellow-coloured touch points guide you to the controls required for normal operation.

Mains Quality Electricity

Digital inverter technology safely powers all your sensitive electronic equipment.

Clean Air Technology

4-stroke OHV petrol engine with Australian and US EPA compliant emission controls.

Plug and Play

Everything you need is in the box. No assembly required. Just add petrol.

Safety Protection


Electrical overload circuit breaker and low engine oil shutdown safeguards.

Warranty Protection

2-year domestic use warranty to safeguard your investment (conditions apply).



Control Panel Functions

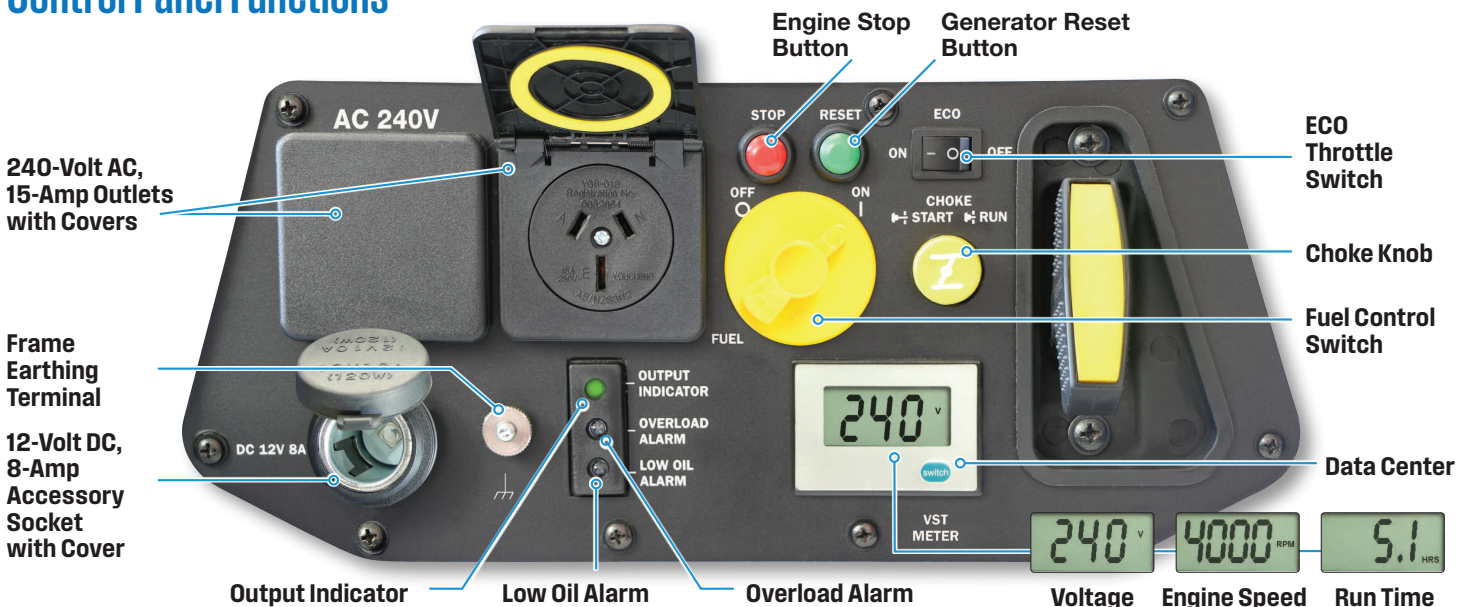

Powering People Since 1886.

2400i CLASSIC Inverter Generator

Specifications

ENGINE		240 VOLT AC ELECTRICAL	
Type	1-Cylinder, 4-Stroke, Overhead Valve, Air Cooled	Voltage (V)	240
Displacement (cc)	79	Frequency (Hz)	50
Maximum Speed (rpm)	5,000	Number of Phases	1
Oil Capacity (mL)	400	Continuous Running Power (W) *	2,100
Oil Viscosity	SAE 15W-40	Maximum Starting Power (W)	2,400
Low Oil Shutdown	Yes	Continuous Running Current (A)	8.8
Low Oil Alarm Indicator	Yes	Voltage & Waveform Control	Digital Inverter, Pure Sine Wave Output
Spark Plug	Torch A5RTC	Total Harmonic Distortion (THD)	< 2.5%
Fuel	Unleaded Petrol # (91, 95 or 98 RON)	Receptacles	2 x 15 A, IP44
Fuel Tank Capacity (L)	5.0	Overload Protection	Electronic
Fuel Gauge	Yes	Overload Indicator	Yes
Fuel Shutoff Valve	Yes, Independent	Overload Reset	Push Button
Starting Method	Recoil	Alternator	Brushless, Permanent Magnet
Run Time @ 1/4 / Full Load	14.9 / 3.8 hours	Output Ready Indicator	Yes
Noise Level @ 1/4 / Full Load	54 / 63 dB(A) @ 7 m	Data Center Display	Output Voltage, Engine Speed & Cumulative Run Time
DIMENSIONS, WEIGHTS & PRODUCT CODES		12 VOLT DC ELECTRICAL	
Generator L x W x H (mm)	500 x 340 x 440	Voltage (V)	12
Generator Weight - Dry / Wet (kg)	20 / 24	Maximum Current (A)	8
Packed L x W x H (mm)	540 x 350 x 505	Maximum Power (W)	100
Packed Weight (kg)	23	Receptacle	8 A, IP44
Product Code	WP WHXC2400i	* Rated output at 1.0 power factor. # Ethanol blends such as E10 are not recommended.	
GTIN Barcode	9347923000023		



Fuel Gauge



Included Accessories

