



The new iGen10000S is the largest Westinghouse inverter generator with four 240-Volt AC 15-Amp outlets. It is ideal for standalone plug and socket connection to large or multiple items of portable electric equipment. The benefits of compact size, light weight, low fuel consumption, quiet running and mains quality power are now available for 8 kVA class applications instead of using a traditional fixed-speed generator.

iGen10000s
Inverter Generator
8200 **10000**
Running Watts Starting Watts

Features and Benefits



Powerful

Highest starting and running power outputs in its class.

Remote Control

Convenient push-button start and stop from a distance.

15-Amp Socket Outlets

4 outlet individually switched powerboard.

Long Running

Up to 19.8 hours @ 1/4 load with 30 L fuel tank.

Easy to Maintain

Engine oil and air filter servicing without need for tools.

Electric Start

One touch power-up from its Lithium-Ion battery.

Battery Charger

Keep your generator ready for use at all times.

Super Quiet

Low dB noise level suitable for unobtrusive use.

Mains Quality Electricity

Safe to power all your electronic equipment.

Warranty Protection


2-year domestic use (conditions apply).



Control Panel Functions

Run Time to Empty (hours) Output Power (kW) Fuel Level (litres) Output Voltage (Volts) Cumulative Run Time (hours)

10:29 P2.88 06.0L U240 0168

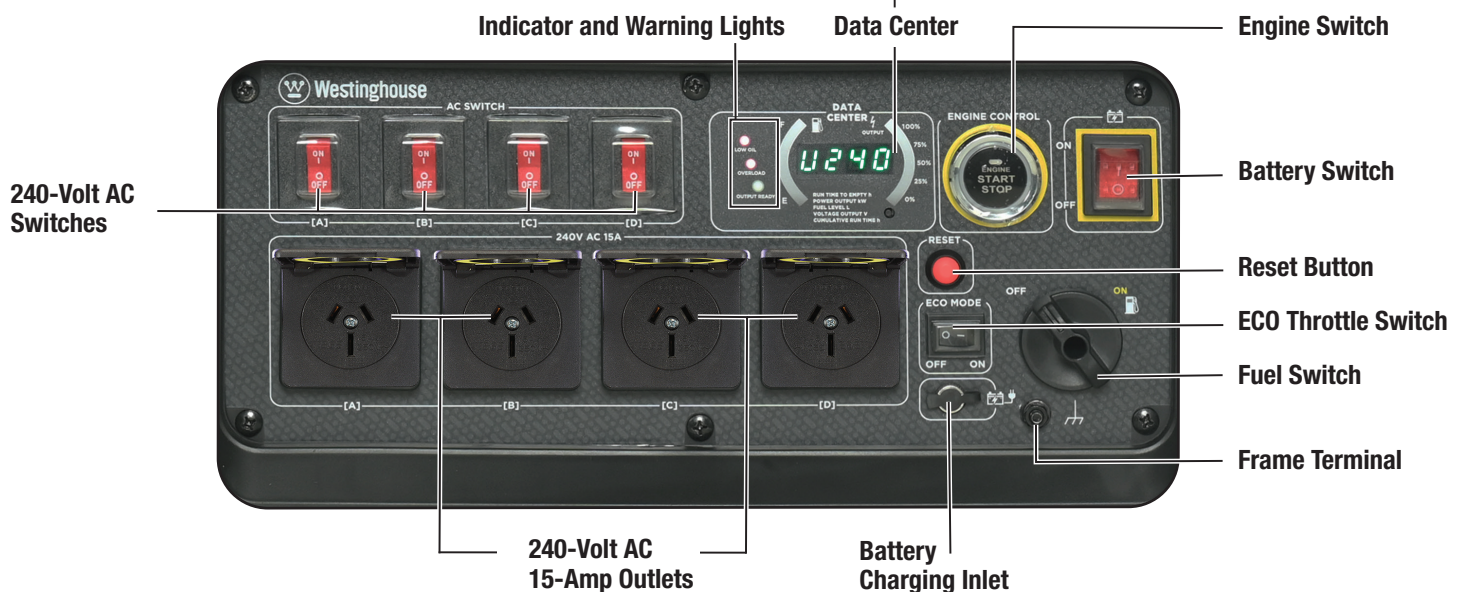

Powering People Since 1886.

Specifications

iGen10000s Inverter Generator

ENGINE		240 VOLT AC ELECTRICAL	
Type	1-Cylinder, 4-Stroke, Overhead Valve, Air Cooled	Voltage (V)	240
Displacement (cc)	457	Frequency (Hz)	50
Maximum Speed (rpm)	3,600	Number of Phases	1
Oil Capacity (mL)	1.1	Continuous Running Power (W) *	8,200
Oil Viscosity	SAE 10W-30	Maximum Starting Power (W)	10,000
Low Oil Shutdown	Yes	Continuous Running Current (A)	34.2
Low Oil Alarm Indicator	Yes	Voltage & Waveform Control	Digital Inverter, Pure Sine Wave Output
Spark Plug	Torch F7RTC	Total Harmonic Distortion (THD)	< 2.5%
Fuel	Unleaded Petrol # (91, 95 or 98 RON)	Receptacles	4 x 15 A, IP44
Fuel Tank Capacity (L)	30	Overload Protection	Electronic
Fuel Shutoff Valve	Yes, Independent	Overload Indicator	Yes
Starting Method	Local / Remote Electric & Recoil	Overload Reset	Push Button
Battery	Lithium-Ion, 12 V, 96 CCA, 19.2 Wh	Alternator	Brushless, Permanent Magnet
Run Time @ 1/4 / Full Load	19.8 / 7.3 hours	Output Ready Indicator	Yes
Noise Level @ 1/4 / Full Load	58 / 68 dB(A) @ 7 m	Data Center Display	Output Power & Voltage, Fuel Level, Fuel & Cumulative Run Times
DIMENSIONS, WEIGHTS & PRODUCT CODES		PRODUCT CODES	
Generator L x W x H (mm)	767 x 630 x 675	Product Code	WP iGen10000S
Generator Weight - Dry / Wet (kg)	85 / 109	GTIN Barcode	9347923003253
Packed L x W x H (mm)	790 x 605 x 740		
Packed Weight (kg)	95		

* Rated output at 1.0 power factor.

Ethanol blends such as E10 are not recommended.



Plug-In Battery Charger



Foldable Handle



Included Accessories

