



The new iGen2750 offers you an appealing fresh choice in the 2.75 kVA generator class. It efficiently and quietly delivers ample clean power capable of running a wide range of electrical devices while still being light and compact enough for single-handed portability. The unique combination of enhanced affordability, superior performance and high-end features puts the iGen2750 at the forefront of the Westinghouse inverter generator line-up.

iGen2750 Inverter Generator

2200	2750
Running Watts	Starting Watts

Features and Benefits

Powerful

Highest electrical output in its class.

Super Quiet

Low noise level ideal for camping or home use.

Long Running

Up to 10.1 hours at 1/4 load with a 4.7 litre fuel tank.

Mains Quality Electricity

Safe to power all your electronic equipment.

Plug and Play

No assembly required before use, just add petrol.

Lightweight

Easy to carry 20 kg with ergonomic handle.

Clean and Efficient

98 cc, 4-stroke OHV petrol engine with ECO throttle.

LED Lights

Illuminate control panel for operating at night-time.

Easy to Maintain


Engine oil and air filter servicing without tools.

Warranty Protection

2-year domestic use (conditions apply).



Control Panel Functions

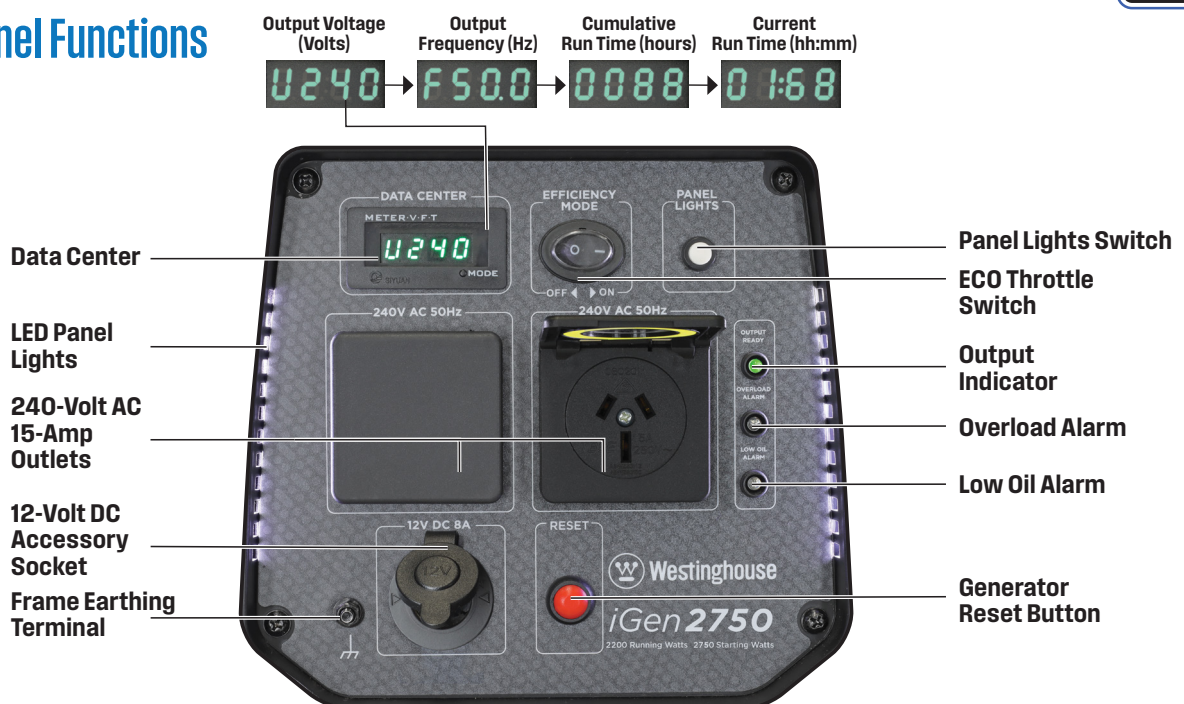

Powering People Since 1886.

Specifications

iGen2750

Inverter Generator

ENGINE		240 VOLT AC ELECTRICAL	
Type	1-Cylinder, 4-Stroke, Overhead Valve, Air Cooled	Voltage (V)	240
Displacement (cc)	98	Frequency (Hz)	50
Maximum Speed (rpm)	5,000	Number of Phases	1
Oil Capacity (mL)	350	Continuous Running Power (W) *	2,200
Oil Viscosity	SAE 10W-30	Maximum Starting Power (W)	2,750
Low Oil Shutdown	Yes	Continuous Running Current (A)	9.2
Low Oil Alarm Indicator	Yes	Voltage & Waveform Control	Digital Inverter, Pure Sine Wave Output
Spark Plug	Torch A7RTC	Total Harmonic Distortion (THD)	< 2.5%
Fuel	Unleaded Petrol # (91, 95 or 98 RON)	Receptacles	2 x 15 A, IP44
Fuel Tank Capacity (L)	4.7	Overload Protection	Electronic
Fuel Gauge	No	Overload Indicator	Yes
Fuel Shutoff Valve	Yes	Overload Reset	Push Button
Starting Method	Recoil	Alternator	Brushless, Permanent Magnet
Run Time @ 1/4 / Full Load	10.1 / 3.2 hours	Output Ready Indicator	Yes
Noise Level @ 1/4 / Full Load	54 / 64 dB(A) @ 7 m	Data Center Display	Output Voltage & Frequency, Current & Cumulative Run Times
DIMENSIONS, WEIGHTS & PRODUCT CODES		Control Panel Lights	LED, Operable While Running
		12 VOLT DC ELECTRICAL	
		Voltage (V)	12
		Maximum Current (A)	8
		Maximum Power (W)	100
		Receptacle	8 A, IP44
		* Rated output at 1.0 power factor. # Ethanol blends such as E10 are not recommended.	
Generator L x W x H (mm)	485 x 297 x 456		
Generator Weight - Dry / Wet (kg)	20 / 24		
Packed L x W x H (mm)	540 x 350 x 521		
Packed Weight (kg)	22		
Product Code	WP iGen2750		
GTIN Barcode	9347923003192		

