

# Westinghouse

The Westinghouse iGen2600 has the highest starting power output in its class to more easily run multiple electrical devices including your RV's air conditioner. Its long-range fuel tank provides ample run time without stopping for more petrol and the dual 240 Volt socket outlets reduce the need for external power boards. The iGen2600 is a lightweight and easily portable unit that operates with good fuel efficiency and low noise level in an environmentally conscious manner.

## iGen2600 Inverter Generator

**2200** **2600**  
Running Watts Starting Watts

### Features and Benefits

#### Powerful

2,600 Watts maximum output is the highest in its class to run more of your electrical devices.

#### Lightweight

At only 22.5 kg it can be easily carried by one person using the ergonomic non-slip handle.

#### Super Quiet

Low dB operating noise level that won't disturb you or your neighbours.

#### Long Running

Up to 10.6 hours @ 1/4 load by its fuel-efficient engine and long range 5-litre fuel tank.

#### Easy To Use

Yellow-coloured touch points guide you to the controls required for normal operation.

#### Mains Quality Electricity

Digital inverter technology safely powers all your sensitive electronic equipment.

#### Clean Air Technology

4-stroke OHV petrol engine with Australian and US EPA compliant emission controls.

#### Plug and Play

Everything you need is in the box. No assembly required. Just add petrol.

#### Safety Protection

Electrical overload circuit breaker and low engine oil shutdown safeguards.

#### Warranty Protection

2-year domestic use warranty to safeguard your investment (conditions apply).



PURE SINE WAVE

### Control Panel Functions

240-Volt AC, 15-Amp Outlets with Covers

Low Oil Alarm safeguards engine

Overload Alarm requires operator attention

Output Indicator shows AC power available


Fuel Level Bar Gauge

Data Center

ECO Throttle Control to minimise fuel consumption

Frame Terminal for earthing

Output Power Level Bar Gauge

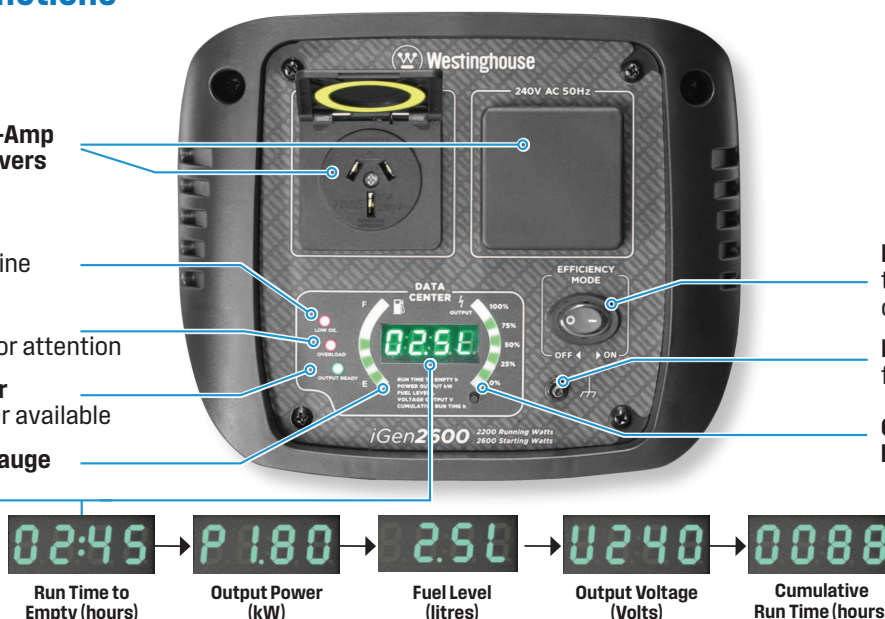

Powering People Since 1886.

# iGen2600

## Inverter Generator

### Specifications

ENGINE		240 VOLT AC ELECTRICAL	
Type	1-Cylinder, 4-Stroke, Overhead Valve, Air Cooled	Voltage (V)	240
Displacement (cc)	98	Frequency (Hz)	50
Maximum Speed (rpm)	5,000	Number of Phases	1
Oil Capacity (mL)	350	Continuous Running Power (W) *	2,200
Oil Viscosity	SAE 10W-30	Maximum Starting Power (W)	2,600
Low Oil Shutdown	Yes	Continuous Running Current (A)	9.2
Low Oil Alarm Indicator	Yes	Voltage & Waveform Control	Digital Inverter, Pure Sine Wave Output
Spark Plug	Torch E6RTC	Total Harmonic Distortion (THD)	< 2.5%
Fuel	Unleaded Petrol # (91, 95 or 98 RON)	Receptacles	2 x 15 A, IP44
Fuel Tank Capacity (L)	5.0	Overload Protection	Electronic
Fuel Shutoff Valve	Yes	Overload Indicator	Yes
Starting Method	Recoil	Alternator	Brushless, Permanent Magnet
Run Time @ 1/4 / Full Load	10.6 / 4.5 hours	Output Ready Indicator	Yes
Noise Level @ 1/4 / Full Load	54 / 64 dB(A) @ 7 m	Data Center Display	Output Power & Voltage, Fuel Level, Fuel & Cumulative Run Times
DIMENSIONS & WEIGHTS		PRODUCT CODES	
Generator L x W x H (mm)	550 x 310 x 480	Product Code	WP iGen2600
Generator Weight - Dry / Wet (kg)	22.5 / 26.5	GTIN Barcode	9347923001730
Packed L x W x H (mm)	595 x 355 x 525		
Packed Weight (kg)	27		

\* Rated output at 1.0 power factor.

# Ethanol blends such as E10 are not recommended.



Included Accessories

