Westinghouse

The new iGen2250PRO offers a unique upgrade in the popular 2 kVA generator class by having an RCD electrical safety switch approved for workplace use. It delivers clean, reliable power to operate a wide range of electrical devices while remaining lightweight and compact for easy portability. Combining quiet operation, dependable performance and enhanced safety protection, the iGen2250PRO is well suited to both recreational use and jobsite applications.

iGen2250PRO
Inverter Generator

1800	2250
Running Watts	Starting Watts

PURE SINE WAVE

Features and Benefits

Powerful
High output to operate more electrical devices.

Lightweight
Easy to carry at just 19 kg with ergonomic handle.

Long Running
Up to 11.3 hours at 1/4 load with a 4.7 litre fuel tank.

Mains Quality Electricity
Safe to power sensitive electronic equipment.

Plug and Play
No assembly required, just add petrol.

Electrical Safety Protection
RCD safety switch approved for workplace use.

Super Quiet
Low noise level ideal for camping or jobsite use.

LED Lights
Illuminate control panel for night-time operation.

Easy to Maintain
Engine oil and air filter servicing without tools.

Warranty Protection
2-year domestic use (conditions apply).

RCD Safety Switch

LED Panel Lights

Control Panel Functions

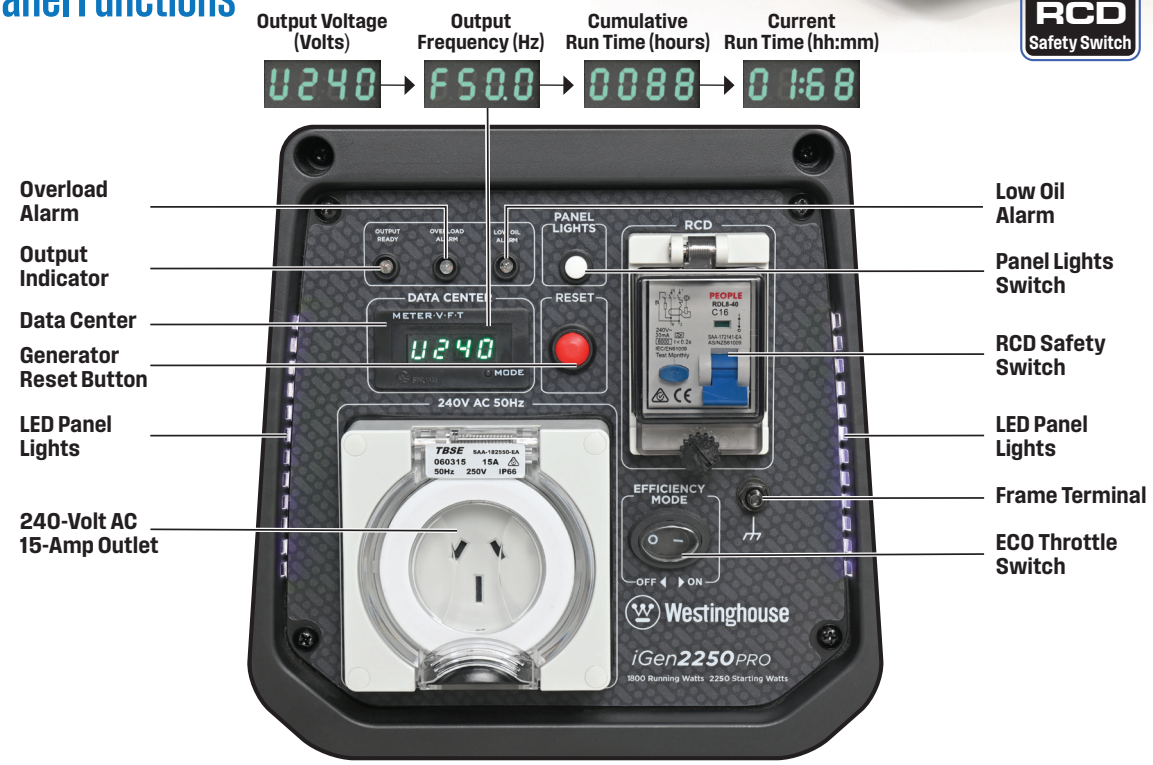

Powering People Since 1886.

iGen2250PRO
Inverter Generator

Specifications

ENGINE	
Type	1-Cylinder, 4-Stroke, Overhead Valve, Air Cooled
Displacement (cc)	80
Maximum Speed (rpm)	5,000
Oil Capacity (mL)	350
Oil Viscosity	SAE 10W-30
Low Oil Shutdown	Yes
Low Oil Alarm Indicator	Yes
Spark Plug	Torch E6RTC
Fuel	Unleaded Petrol # (91, 95 or 98 RON)
Fuel Tank Capacity (L)	4.7
Fuel Gauge	No
Fuel Shutoff Valve	Yes
Starting Method	Recoil
Run Time @ 1/4 / Full Load	11.3 / 3.8 hours
Noise Level @ 1/4 / Full Load	53 / 62 dB(A) @ 7 m
DIMENSIONS & WEIGHTS	
Generator L × W × H (mm)	500 x 297 x 456
Generator Weight - Dry / Wet (kg)	19 / 23
Packed L × W × H (mm)	540 x 350 x 521
Packed Weight (kg)	22

240 VOLT AC ELECTRICAL	
Voltage (V)	240
Frequency (Hz)	50
Number of Phases	1
Continuous Running Power (W) *	1,800
Maximum Starting Power (W)	2,250
Continuous Running Current (A)	7.5
Voltage & Waveform Control	Digital Inverter, Pure Sine Wave Output
Total Harmonic Distortion (THD)	< 2.5%
Receptacles	1 x 15 A, IP66
Overload Protection	Electronic
Overload Indicator	Yes
Overload Reset	Push Button
RCD Safety Switch	Yes
Alternator	Brushless, Permanent Magnet
Output Ready Indicator	Yes
Data Center Display	Output Voltage & Frequency, Current & Cumulative Run Times
Control Panel Lights	LED, Operable While Running
PRODUCT CODES	
Product Code	WP iGen2250PRO
GTIN Barcode	9347923003123

Ethanol blends such as E10 are not recommended.

* Rated output at 1.0 power factor.

Westinghouse

westinghouseoutdoorpower.com.au

Specifications are subject to change without notice. 2026-03-25