



# Westinghouse

INNOVATION YOU CAN BE SURE OF

## iGen2200

## Digital Inverter Generator

Westinghouse digital inverter generators offer you the ultimate in portable power convenience. Lightweight, fuel efficient and quiet, their mains-quality electrical output can safely power all of your sensitive electronic equipment. They're an essential part of your gear for caravanning and camping and also great for home as a backup power supply.

### Features and Benefits

#### Powerful

High maximum power output of 2,200 Watts can run multiple electrical devices simultaneously.

#### Lightweight

At only 21 kg it can be easily carried by one person using the ergonomic non-slip handle.

#### Quiet

Ultra-silent running from only 51 dB(A) that won't disturb you or your neighbours.

#### Long Running

Up to 19 hours achieved by its fuel-efficient engine and long range 4.3 litre fuel tank.

#### Easy To Use

Yellow-coloured touch points guide you to the controls required for normal operation.

#### Mains Quality Electricity

Digital inverter technology safely powers all of your sensitive electronic equipment.

#### Clean Air Technology

4-stroke OHV petrol engine with Australian and US EPA compliant emission controls.

#### Plug and Play

Everything you need is in the box. No assembly required. Just add petrol.

#### Safety Protection

Electrical overload circuit breaker and low engine oil shutdown safeguards.

#### Warranty Protection

2-year domestic use warranty to safeguard your investment (conditions apply).

# 1800 / 2200

RUNNING WATTS      STARTING WATTS



### Control Panel Functions

Low Oil Alarm

Output Indicator

Overload Alarm

Hour Meter

displays cumulative generator run-time


USB Fast Charge Outlet with Cover

Engine, Fuel and Choke Control Switch

ECO Throttle Control to minimise fuel consumption

240-Volt AC, 15-Amp Outlet with Cover

Frame Terminal for earthing

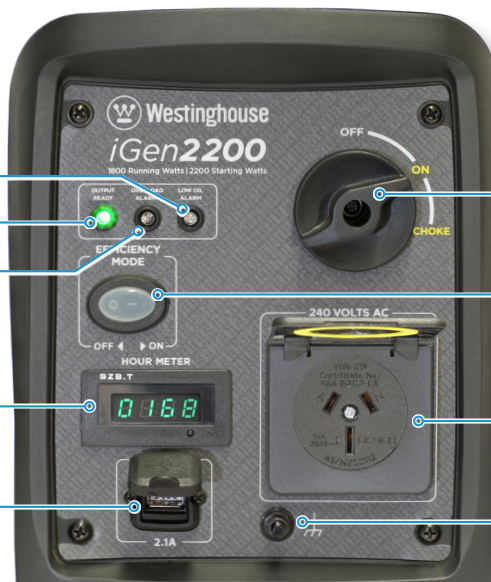

## Power - when you need it - where you need it

# Specifications

# iGen2200

ENGINE	
Type	1-Cylinder, 4-Stroke, Overhead Valve, Air Cooled
Displacement (cc)	79
Maximum Speed (rpm)	5,300
Oil Capacity (mL)	350
Low Oil Shutdown	Yes
Spark Plug	Torch E6RTC
Fuel	Unleaded Petrol
Fuel Tank Capacity (L)	4.3
Fuel Gauge	No
Auto-Speed ECO Throttle	Yes
Starting Method	Recoil
Hour Meter	Yes
Run Time @ 450 / 1,800 W	10 / 5 hours
Noise Level @ 400 / 1,600 W	52 / 61 dB(A) @ 7m
DIMENSIONS	
Length (mm)	500
Width (mm)	285
Height (mm)	450
WEIGHT	
Weight - Dry (kg)	21
Weight - Wet (kg)	24.5

240 VOLT AC ELECTRICAL	
Voltage (V)	240
Frequency (Hz)	50
Number of Phases	1
Continuous Running Power (W) *	1,800
Maximum Starting Power (W)	2,200
Continuous Running Current (A)	7.5
Voltage & Waveform Control	Digital Inverter, Pure Sine Wave Output
Total Harmonic Distortion (THD)	< 2.5%
Receptacle	15 A, IP44
Overload Protection	Electronic
Alternator	Brushless, Permanent Magnet
Output Indicator Light	Yes
5 VOLT DC ELECTRICAL	
Voltage (V)	5
Maximum Current (A)	2.1
Maximum Power (W)	10
Receptacle	USB Type A, IP44

\* Rated output at 1.0 power factor.

